




**Data Sheet - #833**

**LAMINATE PERMANENT ADHESIVE**

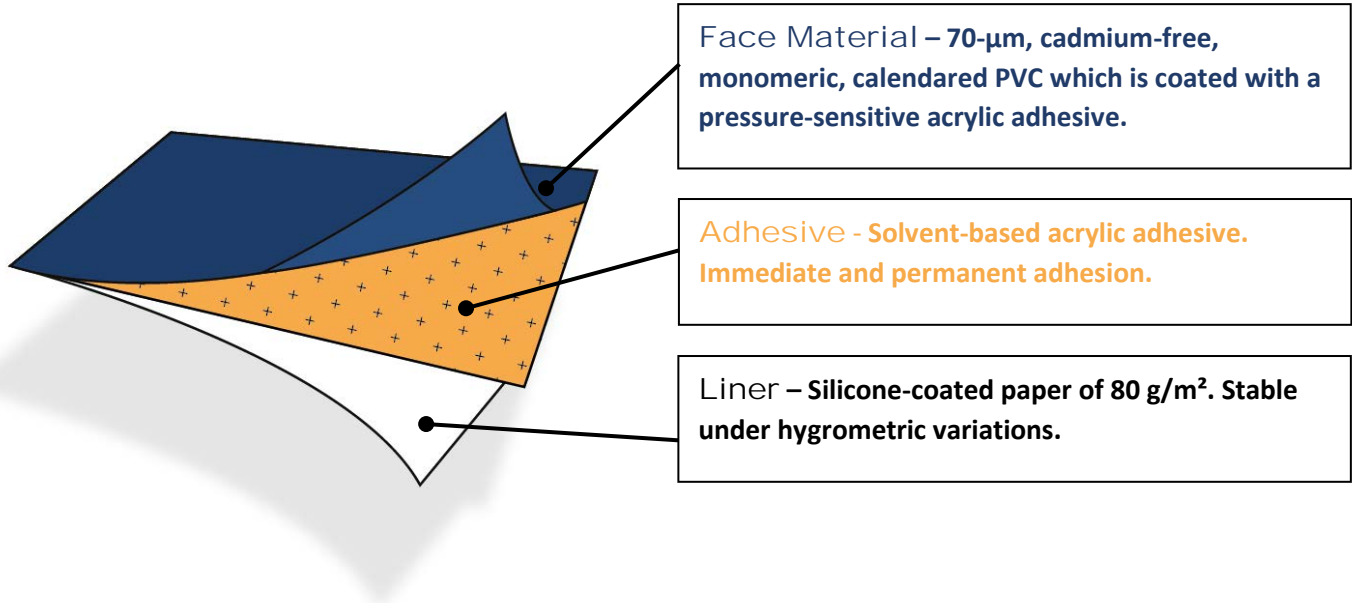

**General #833** is a protective film enabling you to modify the substrates appearance by providing it with a matt surface finish. It is UV proof and resistant against mechanical wear. We strongly advise against #833 when using **v880 and v890**.

**Applications** Depending on the type of substrate to be protected: when applied to paintworks or "non dry" inkjet prints, this laminate may display signs of shrinkage. To avoid such alterations or for medium term applications, we strongly recommend the use of our **v700** laminate.

Using this product to protect water-based inkjet prints, requires an application method with a 2-cm (0.79-in.) extra margin at the edges.

Vertical outdoor exposure up to 2 years (the laminate not the printed film).

Application temperature +10°C to +35°C

Service temperature -30°C to +60°C

Product life 1 year

**Special considerations** The adhesive is resistant to most chemical agents (alcohol, diluted acids and oils). Stored at temperature ranging from 15 °C to 25 °C with relative humidity of 50%, in its original packaging, in an upright position, in a dust-free environment.

All data given is considered reliable but does not constitute a warranty. It is the responsibility of the user to satisfy themselves as to the suitability of the product for the particular application and conditions. A sample for this purpose will be supplied on request.