




## Data Sheet – #219

## MATT SILVER POLYESTER PERMANENT

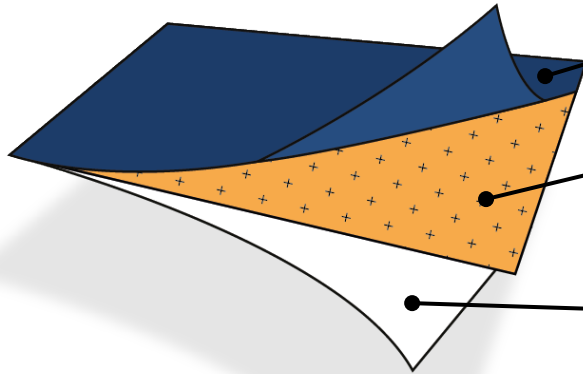

**Face Material** Silver polyester film with backside metallisation.  
Basis Weight - 80g/m<sup>2</sup>  
Caliper - 55µm

**Adhesive** Strong permanent, solvent based acrylate adhesive.

**Liner** White glassine paper.  
Basis Weight - 64g/m<sup>2</sup>  
Caliper - 57µm

**General** #219 is a silver polyester film with backside metallisation. The surface is covered with an absorbing, matt topcoat for very good ink anchorage. It is distinguished by very high ageing stability and features excellent resistance against chemicals, heat and UV light. It has a high peel adhesion on high and medium surface energy substrates.

**Applications** Transfer PET matt silver was specially developed for labels on durable goods, especially in the automotive industry, but also in other segments. Identification labels and logistical labels are the main applications. When printed with high quality thermal transfer ribbons, very high chemical resistance of the print can be achieved.

**Application temperature** Minimum 0°C

**Service temperature** -80°C to +150°C

**Product life** 2 years when stored at 20-25°C | 40-50% RH

**Special considerations** The adhesive meets the requirements of the so-called "Toy Standard" EN 71-3. This product meets the requirements as stated in UL 969 and CSA C22.2 No. 0.15 for indoor and outdoor use. The UL file number is MH27538.

All data given is considered reliable but does not constitute a warranty. It is the responsibility of the user to satisfy themselves as to the suitability of the product for the particular application and conditions. A sample for this purpose will be supplied on request.