




Data Sheet – #235

MATT SILVER POLYCOMP PERMANENT

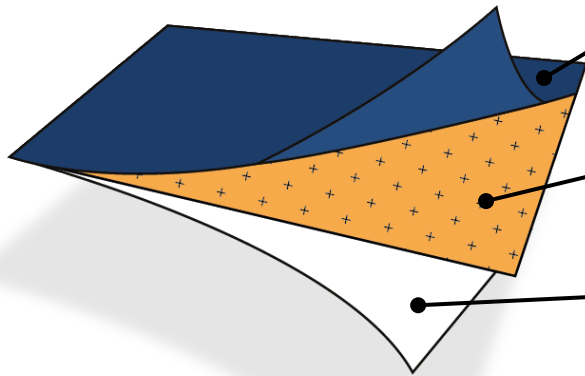

Face Material 50µm top coated silver polyester film
Caliper - 50µm +/-5%

Adhesive Permanent, solvent acrylic adhesive
20µm coat-weight.

Liner 90g kraft liner.
Basis Weight - 90g/m² +/- 4gsm
Caliper - 94µm +/- 6µm

General #235 is a 50 micron silver polyester with a high performance acrylic adhesive and kraft liner.

Applications The topcoat is a smudge-proof computer imprintable coating specifically formulated for universal acceptability of dot matrix and thermal transfer overprinting. Variable information can be applied by computer printer, laser printer, plain paper copier, word processor, typewriter or pen and pencil. The solvent acrylic adhesive has been designed to be an all purpose adhesive with high initial tack and ultimate adhesion.

Application temperature Minimum 5°C

Service temperature -40°C to +150°C

Product life 2 years when stored at 21°C | 50% RH

Special considerations This product has BS5609 Part 2 approval and UL and cUL recognition. UL969 – File No MH15470.

All data given is considered reliable but does not constitute a warranty. It is the responsibility of the user to satisfy themselves as to the suitability of the product for the particular application and conditions. A sample for this purpose will be supplied on request.