




**Data Sheet - #192a**

**OVERLAMINATING PET25**

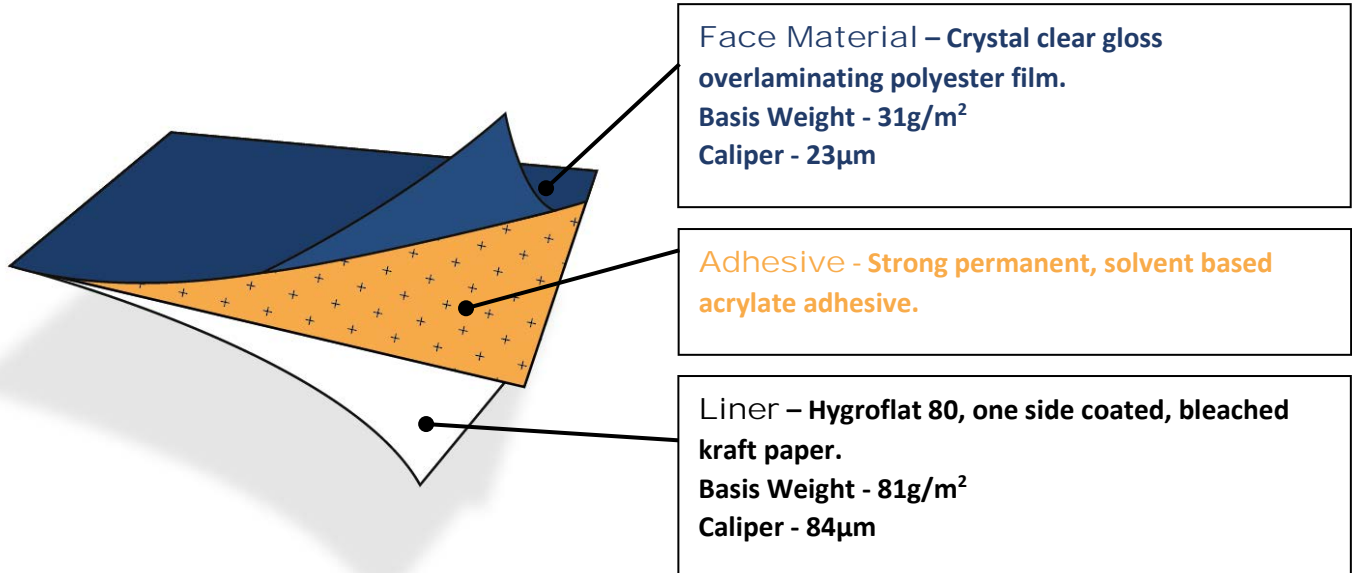

**General** #192a is a crystal clear, gloss overlaminate polyester film with print treated surface for enhanced ink adhesion. This product is designed for overlamination of polyester and vinyl label materials in order to protect the print from abrasion or chemical exposure. It can also improve the durability of other filmic and paper materials.

**Applications** This glass clear product is ideal to change the label appearance to a high gloss finish or to make a label material or printed areas thermal transfer printable. The hygroflat backing paper is generally suited to the refolding demands of the high-speed computer printers, providing optimum layflatness and excellent interfolding characteristics. A decurling bar might be needed for optimum results.

**Application temperature** Minimum 0°C

**Service temperature** -80°C to +150°C

**Product life** 2 years when stored at 20-25°C | 40-50% RH

**Special considerations** This product meets the requirements as stated in UL 969 for indoor use. The UL file number is MH27538. The material complies with BS 5609, Section 2, Marine Immersion Test.

All data given is considered reliable but does not constitute a warranty. It is the responsibility of the user to satisfy themselves as to the suitability of the product for the particular application and conditions. A sample for this purpose will be supplied on request.