




## Data Sheet – #240a

## WHITE TYRE PLUS FSC

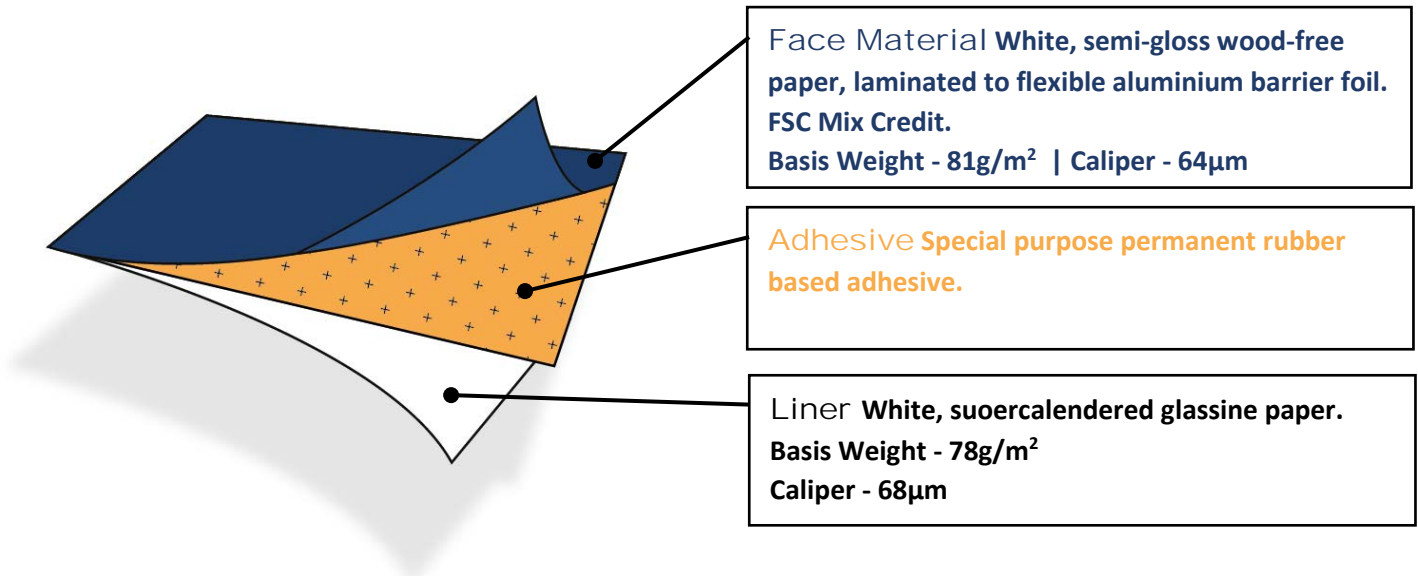

**General** #240a is a white coated, wood-free printing paper with semi-gloss appearance, laminated to a flexible aluminium barrier foil.

**Applications** For track and trace purposes in the tyre industry. The adhesive is specially designed to meet the performance requirements of automotive tyre labelling. The special composition provides a superb anchorage of the label to the compound curved and extremely irregular surface of tyres, neglecting the negative influences of surface contaminants such as mould release agents or components migrating from the rubber. The label material does not have any negative effect on the properties and performance of labelled tyres.

**Application temperature** Minimum 0°C

**Service temperature** -20°C to +70°C

**Product life** 1 year when stored at 20-25°C | 40-50% RH

**Special considerations** The facestock and laminate is made with FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

This product contains a very aggressive adhesive.

All data given is considered reliable but does not constitute a warranty. It is the responsibility of the user to satisfy themselves as to the suitability of the product for the particular application and conditions. A sample for this purpose will be supplied on request.