




Data Sheet - #281

PP NG TOP WHITE

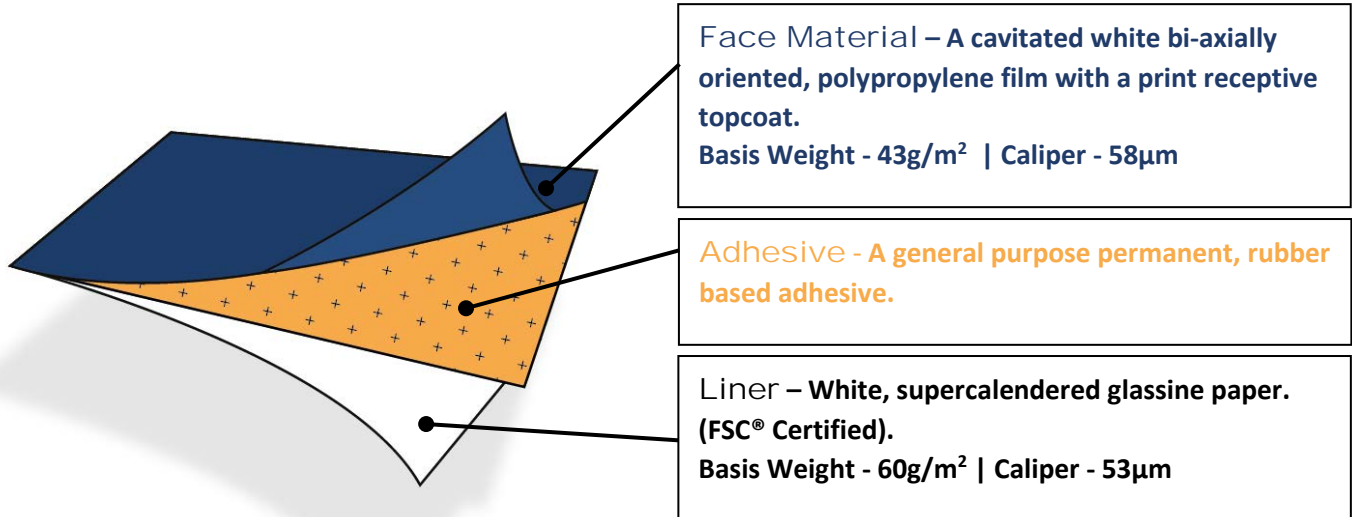

General #281 is a cavitated white bi-axially oriented, polypropylene film with a print-receptive topcoat. The adhesive features excellent tack and adhesion on a wide variety of substrates, including apolar, slightly rough and curved substrates. Particularly good performance at lower temperatures, e.g. labeling of chilled products.

Applications Applications are predominantly in market segments where rigid containers are used (e.g. Glass, PET). Due to fairly rigid nature of the film care should be taken with use on non-uniform surfaces and where a very high level of squeezability is desired.

Application temperature Minimum 0°C

Service temperature -40°C to +70°C

Product life 2 years when stored at 20-25°C | 40-50% RH

Special considerations The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XXI as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs. PP NG TOP WHITE is in compliance with Article 3-1 (a) of Regulation (EC) No 1935/2004. PP NG TOP WHITE can be used in any food application. This material complies with BS 5609, Section two, Marine Immersion Test. The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

All data given is considered reliable but does not constitute a warranty. It is the responsibility of the user to satisfy themselves as to the suitability of the product for the particular application and conditions. A sample for this purpose will be supplied on request.