




## Data Sheet – #1306

## MATT WHITE PAPER COMPOSTABLE PERMANENT

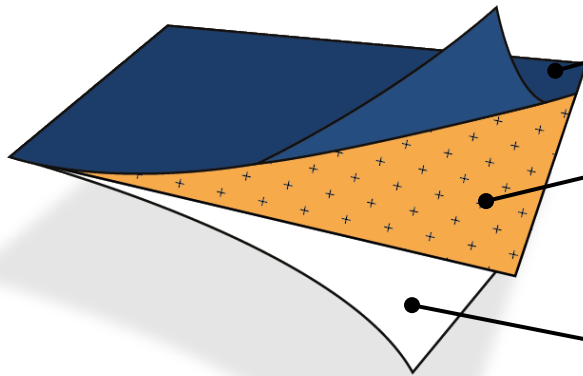

**Face Material** Matt white woodfree printing paper. (FSC® Certified) Basis Weight - 68g/m<sup>2</sup>  
Caliper - 66µm

**Adhesive** Permanent, acrylic based biodegradable and compostable adhesive. Good initial tack and good adhesion on a wide variety of substrates.

**Liner** White glassine paper.  
Basis Weight - 60g/m<sup>2</sup>  
Caliper - 53µm

**General** #1306 is a white, surface-sized and supercalendered woodfree printing paper with biodegradable and compostable adhesive.

**Applications** The white economical multipurpose paper provides good print resolution of picket fence barcodes and numeric data with thermal transfer print speed up to 150mm/sec. Main applications are print & apply, warehouse inventory labelling and other in-house product identification labels. The adhesive is ideal to be used for all kinds of applications but is specifically suited for those kinds of applications where the complete packaging should be biodegradable and where indirect or direct food contact with dry foodstuff is required (ie. fruits and vegetables labelling).

**Application temperature** Minimum 5°C

**Service temperature** -20°C to +80°C

**Product life** 2 years when stored at 20-25°C | 40-50% RH

**Special considerations** The adhesive is compliant with European food regulations 1935/2004/EC for direct food contact with dry, non-fatty foodstuff.

The adhesive complies with DIN EN 13432 biodegradability and compostability regulation and is OK compost certified under the tracking number S0259.

The face material and liner are made from FSC® Certified paper (FSC Mix Credit, chain of custody number: CU-COC-807907, Licence Code: C004451)

All data given is considered reliable but does not constitute a warranty. It is the responsibility of the user to satisfy themselves as to the suitability of the product for the particular application and conditions. A sample for this purpose will be supplied on request.