




**Data Sheet - #101**

**TRANSFER VELLUM FSC**

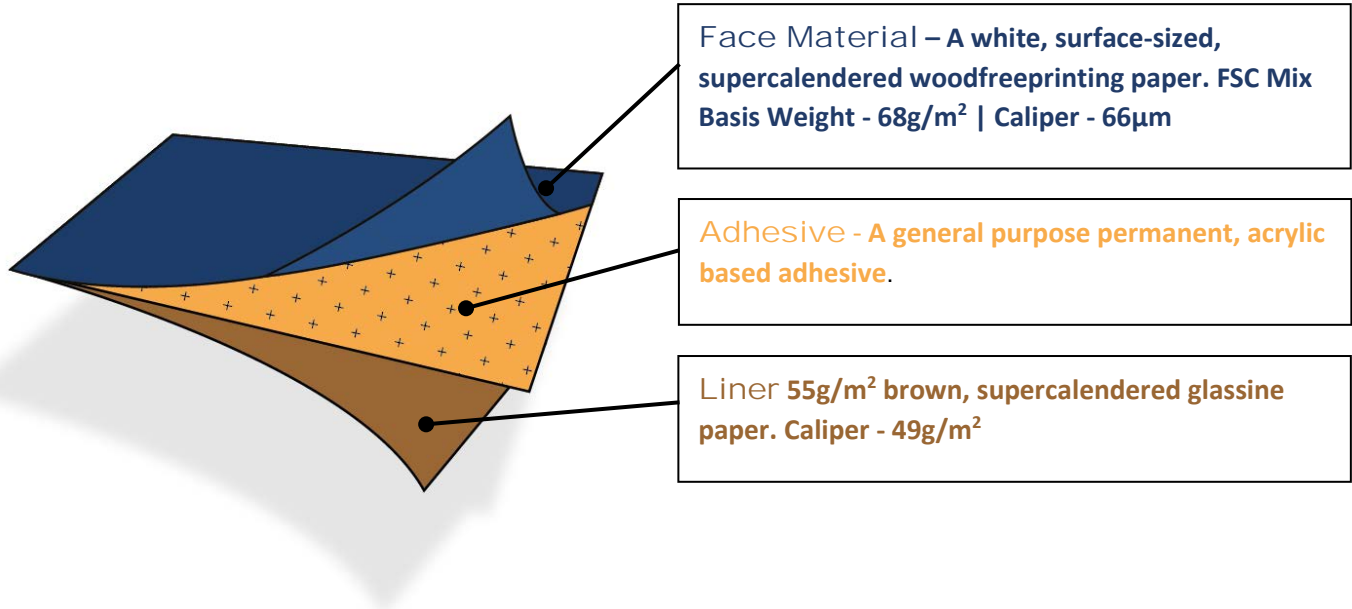

**General #101** is a white, surface-sized, supercalendered woodfree printing FSC paper with a premium general purpose permanent, acrylic based adhesive. It has a brown, supercalendered glassine paper liner.

**Applications** This white economical multipurpose paper provides good print resolution of picket fence barcodes and numeric data with thermal transfer print speed up to 150mm/sec. Main applications are print & apply, warehouse inventory labeling and other inhouse product identification labels. The adhesive is characterized by a high initial tack, excellent adhesion and good low temperature performance on a wide variety of substrates.

**Application temperature** Minimum 3°C

**Service temperature** -20°C to +80°C

**Product life** 2 years from date of production when stored at 20-25°C | 40-50% RH.

**Special considerations** Complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA §175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive S2046 may safely stand in direct contact with dry, moist and fatty foodstuffs which have a reduction factor of at least 3 according to the Commission Regulation (EU) No 10/2011.

All data given is considered reliable but does not constitute a warranty. It is the responsibility of the user to satisfy themselves as to the suitability of the product for the particular application and conditions. A sample for this purpose will be supplied on request.